




BEARING DRIVESHAFT, INC.

6 mm x 19 mm x 6 mm 21063/21212 Bearing
GPZ Tapered Roller Bearing Original Made In
China

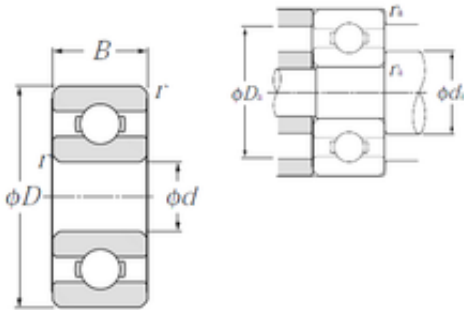

Bearing No. 626

626 Bearing 2D drawings and 3D CAD models

Size	6x19x6 mm
Bore Diameter	6 mm
Outer Diameter	19 mm
Width	6 mm
d	6 mm
D	19 mm
B	6 mm
C	6 mm
r min.	0,3 mm
da min.	8 mm
da max	9,5 mm
Da max.	17 mm
ra max.	0,3 mm
Weight	8,1 Kg
Basic dynamic load rating (C)	2,34 kN
Basic static load rating (C0)	0,885 kN
(Grease) Lubrication Speed	34 000 r/min
(Oil) Lubrication Speed	40 000 r/min
rs min	0.3 mm
Radial clearance class	CN
Mass	0.009 kg
Dynamic load, C	2.34 kN
Static load, C0	0.88 kN
Fatigue limit load, Cu	0.04 kN



BEARING DRIVESHAFT, INC.

f0	12.1
Nlim (oil)	40,000 rpm
Nlim (grease)	34,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
da min	8 mm
Da max	17 mm
ra max	0.3 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.008
EAN	4547359011005
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	6MM Bore; 19MM Outside Diameter; 6MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing



BEARING DRIVESHAFT, INC.

UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	626
Weight / LBS	0.018
Outside Diameter	0.748 Inch 19 Millimeter
Bore	0.236 Inch 6 Millimeter
Outer Race Width	0.236 Inch 6 Millimeter
bore diameter:	6 mm
finish/coating:	Uncoated
outside diameter:	19 mm
bearing material:	High Carbon Chrome Steel
overall width:	6 mm
cage material:	Steel
bore type:	Round
inner ring width:	6 mm
closure type:	Open
outer ring width:	6 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	34000 rpm
snap ring included:	Without Snap Ring
maximum rpm (oil):	40000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	40000 RPM
dynamic load capacity:	2340 N
series:	Micro
static load capacity:	885 N



BEARING DRIVESHAFT,INC.

manufacturer product page:	Click here
precision rating:	Class 0